



**A PERFECT LOW COST SOLUTION FOR EASY INTEGRATION IN CUSTOMER'S HOST SYSTEM**

Use with Opsens' WLPI fiber optic sensors — • Pressure • Temperature • Strain • Position

## Key Features

- Up to 16 measurement channels
- High linearity and precision
- Easy OEM migration
- 20 Hz sampling rate
- private label option

## Applications

- Medical application
- Microwave assisted chemistry
- High voltage environment
- EMI, RFI and microwave environments
- Nuclear and hazardous environments

## Description

The OEM-FMS is an OEM-Type signal conditioner based on the WLPI technology (patent # 7,259,862) to be used with any Opsens' interferometric fiber optic sensors for temperature, pressure, strain, and position measurements.


This conditioner offers the OEM customer a product package designed for their specific needs. Its compact size and modular assembly give OEM's the best in design flexibility.

The OEM-FMS comes with or without external casing, private label option and with various interface for easy integration into customer's host systems.

### Opsens

2014 Cyrille-Duquet Street  
Suite 125  
Quebec City QC  
G1N 4N6 Canada

☎ 1.418.682.9996  
✉ 1.418.682.9939  
Info@opsens.com  
www.opsens.com

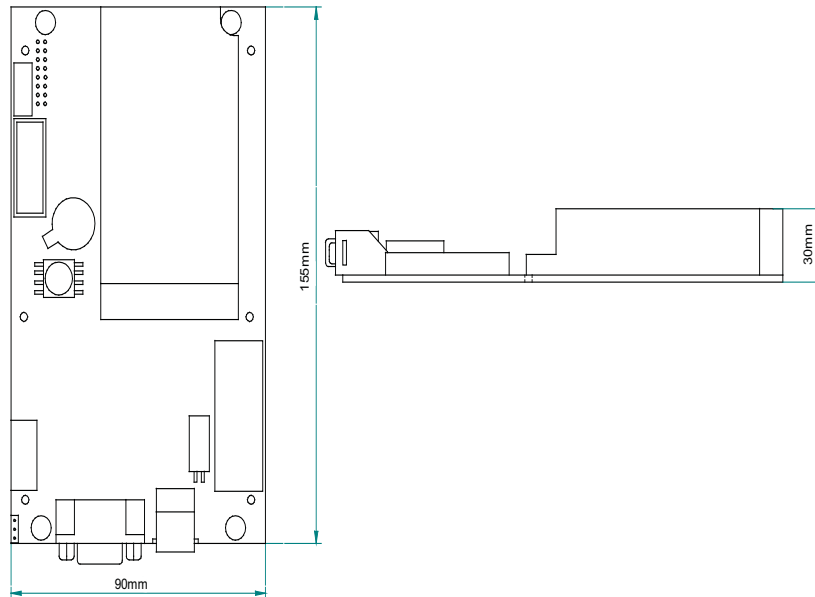

## Specifications

Number of channels	4, 8, 12 or 16
Compatibility	All Opsens WLPI fiber optic sensors
Full scale	30 000 nm (path length difference)
Resolution	±0.003 % of F.S. (no averaging)
Precision	±0.01 % of F.S. @ ±3.3 sigma limit (99.9 % confidence level)
Sampling rate	20 Hz standard (rate given for a fixed channel)
Output interface	RS-232, RS-485 or ±5 V
Display	LCD screen display standard Can be ordered without display
Input power	9 to 24 VDC (AD/DC wall-transformer adapter included)
Consumption	1.8 Watt typical
Storage temperature	- 40 °C to 70 °C
Operating temperature	0 °C to 45°C
Humidity	95 % non condensing
Light source life span	40 000 hours MTBF

All specifications are subject to change without prior notifications